


Bathroom radiators "QUADRO DUO-N"

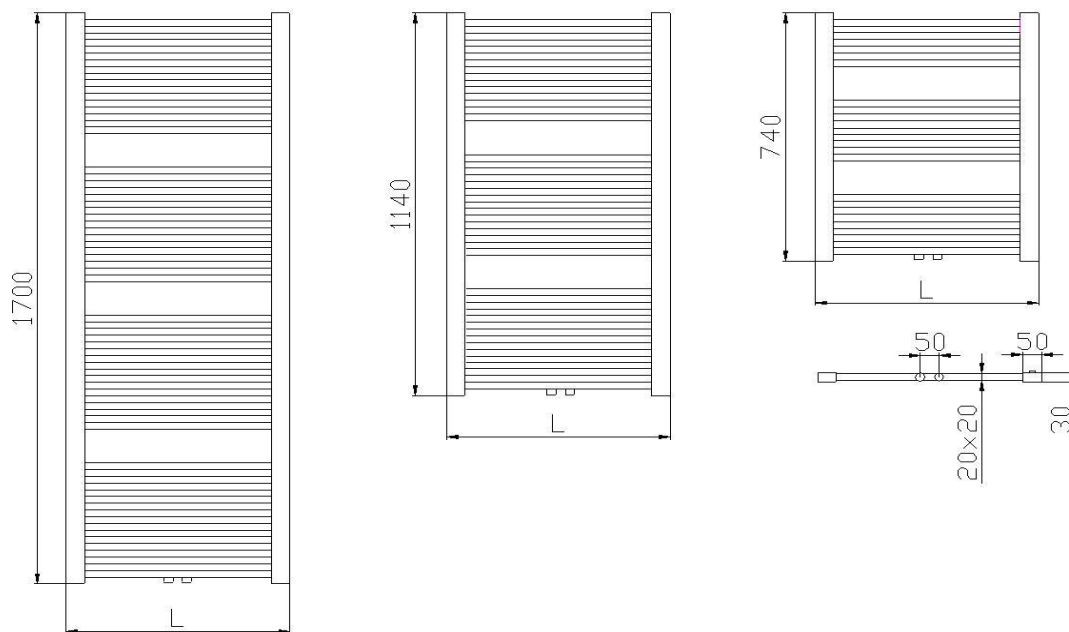

Characteristic details:

Width	L	(mm)	500	600	
High	H	(mm)	740	1140	1700
Spacing	A	(mm)			
Test overpressure	p	(MPa)		1,3	
The overpressure	p	(MPa)		1,0	
Depth	R	(mm)			
Conection: center DN			G 1/2" internal		

Material:

Rectangular profile	50 x 30 x 1,5 mm
Square tubes	20 x 20 mm
Including accessories	
Waranty	5 years on the radiator

Surface design:

standard RAL 9016
RAL



QUADRO DUO-N
The heat output Q (W) and engineering characteristic
RAL

The type designation	Width L (mm)	High H (mm)	Depth R (mm)	Spacing A (mm)	tw1/tw2 = 90/70 (°C) near t1 (°C)					The water content (l)	Weight (kg)	The total area SL (m ²)	Recommended output of heating element (W)
					tw1/tw2 = 75/65 (°C) near t1 (°C)								
					tw1/tw2 = 55/45 (°C) near t1 (°C)								
					15	18	20	22	24				
NC-D8-500.0740-40-01+MM	500	740	30	50	532 419 213	500 394 200	479 382 192	458 361 183	438 345 175	2,88	6,3	0,680	300
NC-D8-600.0740-40-01+MM	600	740	30	50	618 487 247	581 458 232	557 437 223	532 419 213	508 400 203	3,14	7,2	0,800	400
NC-D8-500.1140-40-01+MM	500	1140	30	50	925 709 370	870 666 348	833 634 333	797 608 319	761 580 304	3,89	10,3	1,130	500
NC-D8-600.1140-40-01+MM	600	1140	30	50	1005 805 452	950 766 425	913 733 413	888 701 399	841 680 384	4,15	11,8	1,320	600
NC-D8-500.1700-40-01+MM	500	1700	30	50	1381 1110 615	1298 1032 547	1244 951 503	1190 910 459	1137 859 417	5,31	15,4	1,700	800
NC-D8-600.1700-40-01+MM	600	1700	30	50	1491 1110 715	1402 1032 647	1344 1096 603	1290 929 559	1237 879 517	5,57	17,6	1,980	900