


Bathroom radiators "TROPIC-N"

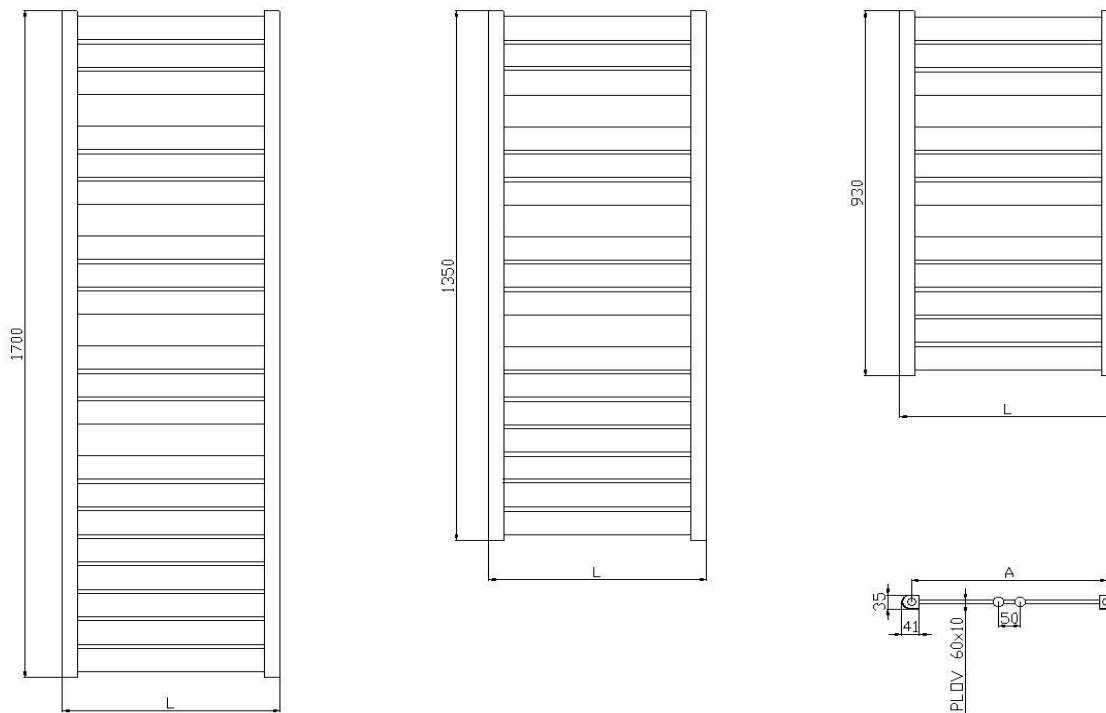

Characteristic details:

Width	L	(mm)		500	600	
High	H	(mm)		930	1350	1700
Spacing	A	(mm)				
Test overpressure	p	(MPa)	0,6			
The overpressure	p	(MPa)	0,4			
Depth	R	(mm)				
Conection: lower x center DN				G 1/2" internal		

Material:

The steel D-profile	35 x 41 x 1,5 mm
The steel flat	60 x 10,4 mm
Including accessories	
Waranty	5 years on the radiator

Surface design:

standard RAL 9016
RAL



TROPIC-N
The heat output Q (W) and engineering characteristic
RAL

The type designation	Width L (mm)	High H (mm)	Depth R (mm)	Spacing A (mm)	tw1/tw2 = 90/70 (°C) near t1 (°C)					The water content (l)	Weight (kg)	The total area SL (m ²)	Recommended output of heating element (W)
					tw1/tw2 = 75/65 (°C) near t1 (°C)								
					15	18	20	22	24				
NT-05-500.0930-70-01	500	930	35	459	650 512 271	611 481 255	585 461 244	560 441 234	535 421 223	3,5	15,0	0,799	400
NT-05-600.0930-70-01	600	930	35	559	750 591 313	705 555 294	676 532 282	646 509 270	617 486 257	4	17,5	0,945	500
NT-05-500.1350-70-01	500	1350	35	459	933 727 385	877 684 362	840 655 347	803 626 332	767 598 317	5,2	22,2	1,162	600
NT-05-600.1350-70-01	600	1350	35	559	1071 838 444	1007 788 418	965 755 400	922 722 383	881 689 365	5,9	25,0	1,373	700
NT-05-500.1700-70-01	500	1700	35	459	1172 906 480	1102 852 452	1056 816 432	1009 780 413	964 745 395	6,5	27,8	1,456	800
NT-05-600.1700-70-01	600	1700	35	559	1329 1043 553	1250 981 520	1198 940 498	1145 899 476	1093 858 455	7,2	31,0	1,720	900