


Bathroom radiators "Sorento"

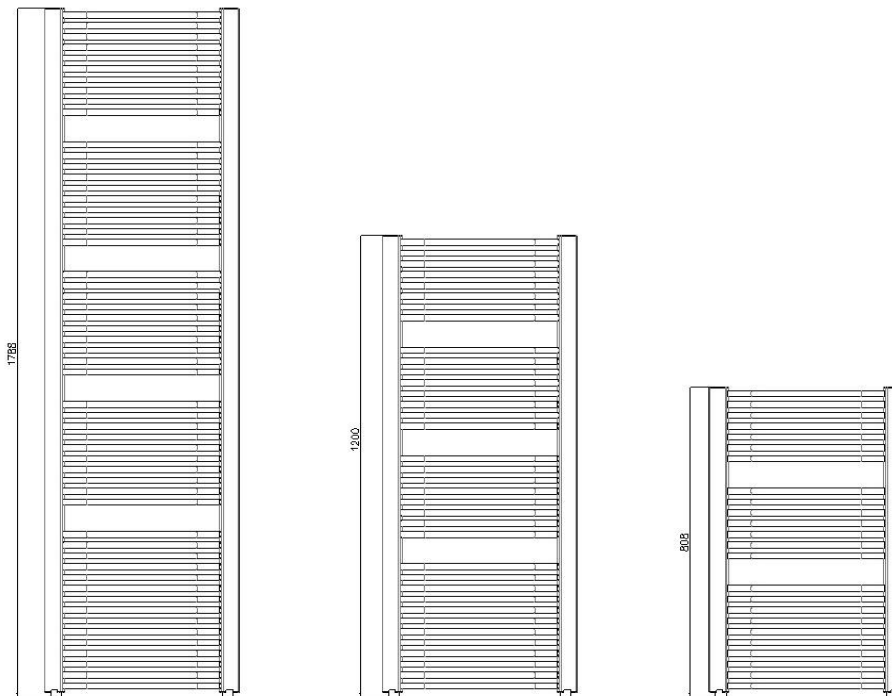

Characteristic details:

Width	L	(mm)	450	600	750
High	H	(mm)	808	1200	1788
Spacing	A	(mm)			
Test overpressure	p	(MPa)	1,3		
The overpressure	p	(MPa)	1,0		
Depth	R	(mm)			
Conection: lower			G 1/2" internal		

Material:

The steel profile: 25 x 45 mm
 Steel tube: Ø 16 mm
 Including accessories
 Warranty: 5 years on the radiator

Surface design:

Standard RAL 9016
 RAL



Sorento The heat output Q (W) and engineering characteristic RAL

The type designation	Width L (mm)	Height H (mm)	tw1/tw2 = 90/70 (°C) při t1 (°C)			Weight (kg)	Recommended output of heating element (W)
			tw1/tw2 = 75/65 (°C) při t1 (°C)				
			tw1/tw2 = 55/45 (°C) při t1 (°C)				
			18	20	22		
XU-89-450.0808	450	808	484 389 213	464 370 196	445 352 180	6,72	200
XU-89-600.0808	600	808	627 504 276	602 480 254	577 456 234	8,16	300
XU-89-750.0808	750	808	771 620 339	740 590 313	710 561 287	9,60	400
XU-89-450.1200	450	1200	731 583 312	701 554 287	671 526 263	10,08	300
XU-89-600.1200	600	1200	949 757 405	910 720 373	871 683 341	12,24	500
XU-89-750.1200	750	1200	1167 930 498	1119 885 458	1071 839 419	14,40	600
XU-89-450.1788	450	1788	1115 888 455	1066 833 417	1018 788 380	15,26	500
XU-89-600.1788	600	1788	1447 1140 591	1384 1081 542	1322 1023 493	18,56	700
XU-89-750.1788	750	1788	1780 1402 727	1702 1330 666	1626 1258 607	21,86	800