

Characteristic details:

Width	L	(mm)	298	450	602		
High	H	(mm)	600	900	1200	1500	1800
Spacing		(mm)	50				
Spacing side connection (for width) A:		(mm)	238	390	542		
Test overpressure	p	(MPa)	0,65				
The overpressure	p	(MPa)	0,5				
Depth		(mm)	64				
Conection: lower x center DN				G 1/2" internal			

Material:

The steel profile 70 x 11 x 1,5 mm

Steel tube \varnothing 25 x 1,5 mm

Including accessories

Waranty 5 years

Surface design:

standard RAL 9016


RAL



ALGARVE-N		The heat output Q (W) and engineering characteristic					RAL	
The type designation	Width L (mm)	Height H (mm)	Depth R (mm)	Spacing A (mm)	side connection (mm)	tw1/tw2 = 90/70 (°C) near 20 (°C) tw1/tw2 = 75/65 (°C) near 20 (°C) tw1/tw2 = 55/45 (°C) near 20 (°C)	The water content (l)	Weight (kg)
						Q(W)		
NT-05-600.0298-76-01	298	600	64	50	238	253 196 96	1,5	5,1
NT-05-900.0298-76-01	298	900	64	50	238	364 282 138	2,2	7,3
NT-05-1200.0298-76-01	298	1200	64	50	238	479 371 181	2,8	9,4
NT-05-1500.0298-76-01	298	1500	64	50	238	590 457 224	3,4	11,7
NT-05-1800.0298-76-01	298	1800	64	50	238	701 543 266	4,1	14,0
NT-05-600.0450-76-01	450	600	64	50	390	373 294 151	2,3	7,5
NT-05-900.0450-76-01	450	900	64	50	391	539 425 219	3,2	10,5
NT-05-1200.0450-76-01	450	1200	64	50	392	705 556 286	4,2	14,0
NT-05-1500.0450-76-01	450	1500	64	50	393	869 686 656	5,2	17,5
NT-05-1800.0450-76-01	450	1800	64	50	394	1034 816 420	6,1	20,8
NT-05-600.0602-76-01	602	600	64	50	542	487 391 212	3	9,8
NT-05-900.0602-76-01	602	900	64	50	542	704 566 307	4,3	14,2
NT-05-1200.0602-76-01	602	1200	64	50	542	922 741 401	5,6	18,5
NT-05-1500.0602-76-01	602	1500	64	50	542	1139 915 496	6,9	23,1
NT-05-1800.0602-76-01	602	1800	64	50	542	1355 1089 590	8,2	27,7

Accessories- Set of plastic

1. wall plug
2. washer
3. screw
4. holder

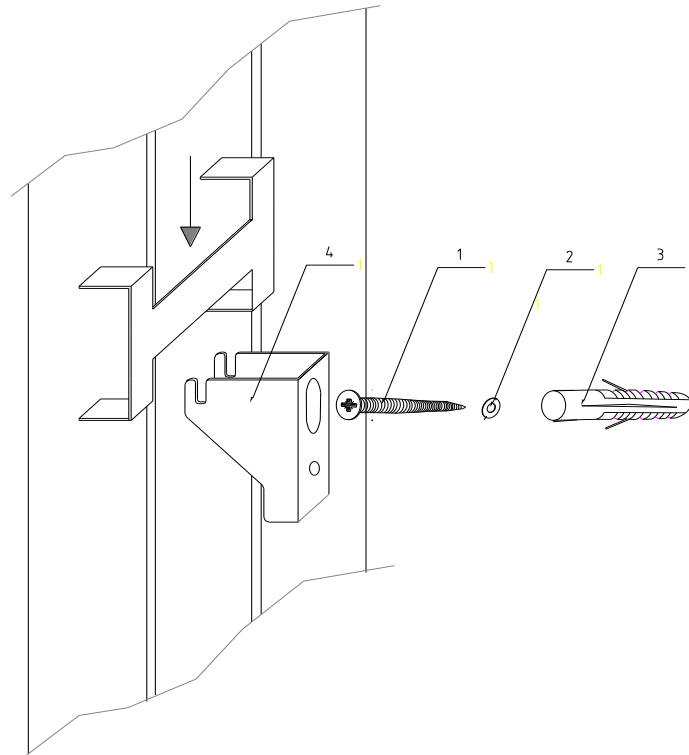

The plug and bleed screw G 1/2"



The material: German silver

Tightening torque max. 25 Nm \pm 3 Nm

universal attachment on the wall

