


**Bathroom radiators "DRAKO"**

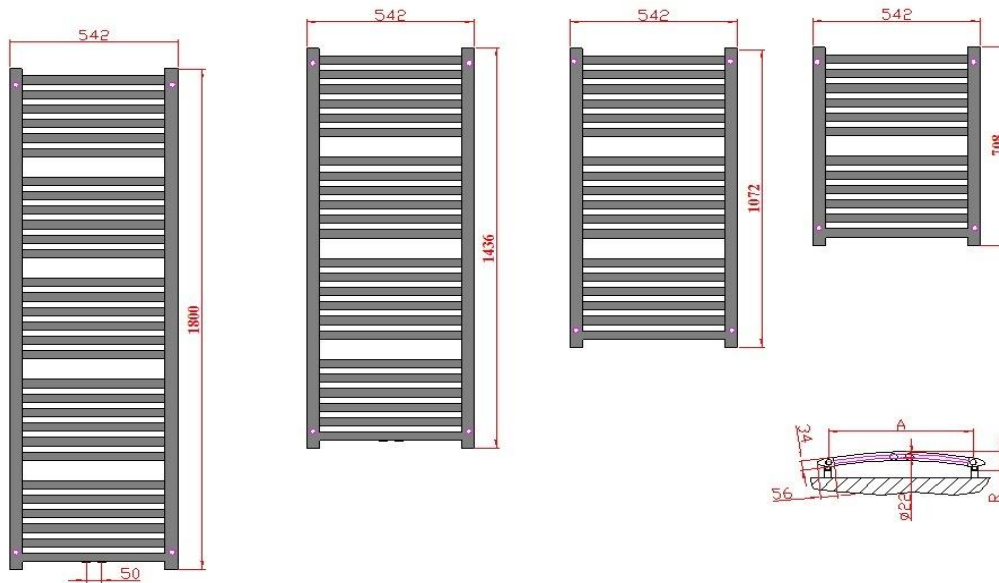

**Characteristic details:**

Width	L	(mm)	542			
High	H	(mm)	708	1072	1436	1800
Spacing	A	(mm)	465			
Test overpressure	p	(Mpa)	1,3			
The overpressure	p	(Mpa)	1,0			
Depth	R	(mm)	69			
Conection: center DN			G 1/2" internal			

**Material:**

- Steel profile 34 x 56 x 2 mm
- Steel profile 30x10 mm, (30x30 mm only MM)
- Including accessories
- Waranty 5 years on the radiator

**Surface design:**

standard RAL 9016  
RAL



**DRAKO**

**The heat output Q (W) and engineering characteristic**

**RAL**

The type designation	Width L (mm)	High H (mm)	Depth R (mm)	Spacing A (mm)	tw1/tw2 = 75/65 (°C) near t1 (°C)	The water content (l)	Weight (kg)	The total area SL (m <sup>2</sup> )	Recommended output of heating element (W)
					20 °C				
NE-08-542.0708-52	542	708	69	465	<b>360</b>	2,36	9,5	0,710	300
NE-08-500.1072-52	542	1072	69	465	<b>541</b>	3,56	13,5	1,060	500
NE-08-500.1436-52	542	1436	69	465	<b>723</b>	4,76	17,5	1,420	600
NE-08-500.1800-52	542	1800	69	465	<b>904</b>	5,96	21,5	1,780	800