


### Bathroom radiators "ELLIOT-N"

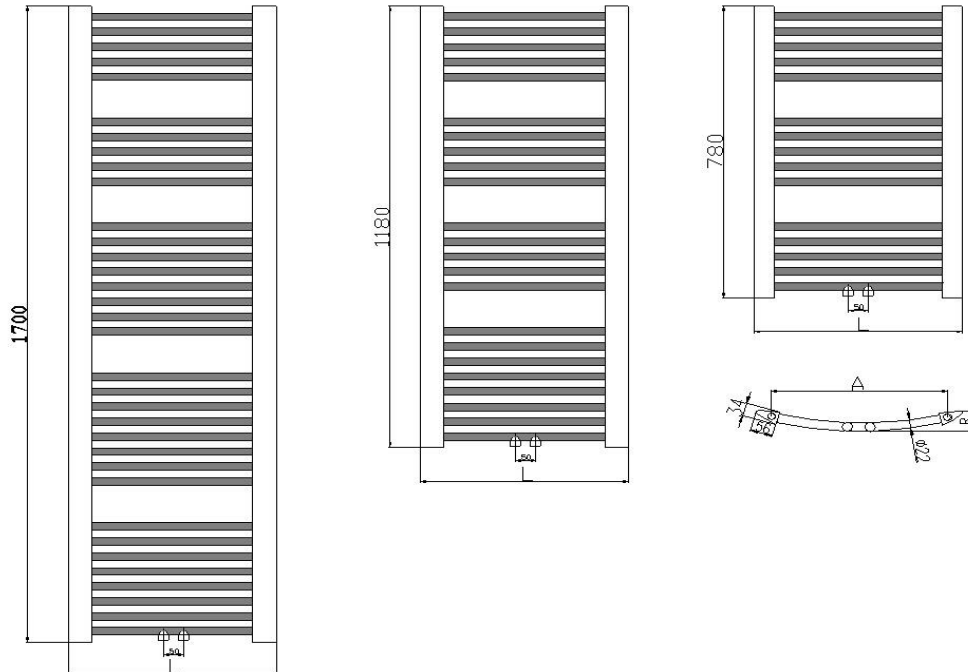

**Characteristic details:**

Width	L	(mm)		500	600	750	900
High	H	(mm)		780	1180	1700	
Spacing	A	(mm)					
Test overpressure	p	(MPa)	1,3				
The overpressure	p	(MPa)	1,0				
Depth	R	(mm)					
Conection: center DN				G 1/2" internal			

**Material:**

The steel profile	34 x 56 x 1,5 mm
Steel tube	Ø 22,2 x 1,2 mm
Including accessories	
Waranty	5 years on the radiator

**Surface design:**


standard RAL 9016  
RAL



**ELLIOT-N**
**The heat output Q (W) and engineering characteristic**
**RAL**

The type designation	Width L (mm)	High H (mm)	Depth R (mm)	Spacing A (mm)	tw1/tw2 = 90/70 (°C) near t1 (°C)					The water content (l)	Weight (kg)	The total area SL (m <sup>2</sup> )	Recommended output of heating element (W)
					tw1/tw2 = 75/65 (°C) near t1 (°C)								
					15	18	20	22	24				
NE-03-500.0780-40-01+MM	500	780	51	425	503	473	453	433	414	3,5	7,4	0,669	300
					<b>403</b>	<b>379</b>	<b>363</b>	<b>347</b>	<b>331</b>				
NE-03-600.0780-40-01+MM	600	780	55	525	587	552	529	506	483	3,8	8,2	0,774	300
					<b>473</b>	<b>445</b>	<b>426</b>	<b>407</b>	<b>389</b>				
NE-03-750.0780-40-01+MM	750	780	62	675	697	656	628	600	573	4,6	9,9	0,931	400
					<b>576</b>	<b>542</b>	<b>519</b>	<b>496</b>	<b>474</b>				
NE-03-500.1180-40-01+MM	500	1180	51	425	749	705	675	645	646	5,3	11,3	1,021	500
					<b>604</b>	<b>568</b>	<b>544</b>	<b>520</b>	<b>497</b>				
NE-03-600.1180-40-01+MM	600	1180	55	525	875	823	789	754	720	5,6	12,4	1,181	600
					<b>708</b>	<b>666</b>	<b>638</b>	<b>610</b>	<b>582</b>				
NE-03-750.1180-40-01+MM	750	1180	62	675	1059	996	954	912	871	6,9	14,5	1,422	700
					<b>862</b>	<b>811</b>	<b>777</b>	<b>743</b>	<b>709</b>				
NE-03-900.1180-40-01+MM	900	1180	71	825	1238	1165	1116	1067	1019	8,1	17,2	1,662	800
					<b>1013</b>	<b>953</b>	<b>913</b>	<b>873</b>	<b>834</b>				
NE-03-500.1700-40-01+MM	500	1700	51	425	1101	1036	992	949	906	7,8	16,4	1,494	700
					<b>882</b>	<b>830</b>	<b>795</b>	<b>760</b>	<b>726</b>				
NE-03-600.1700-40-01+MM	600	1700	55	525	1287	1210	1159	1108	1058	8,5	18,0	1,731	900
					<b>1037</b>	<b>975</b>	<b>934</b>	<b>893</b>	<b>853</b>				
NE-03-750.1700-40-01+MM	750	1700	62	675	1554	1461	1400	1338	1278	10,1	21,2	2,086	1000
					<b>1262</b>	<b>1187</b>	<b>1137</b>	<b>1087</b>	<b>1038</b>				
NE-03-900.1700-40-01+MM	900	1700	71	825	1809	1702	1630	1558	1488	11,8	25,1	2,442	1000
					<b>1482</b>	<b>1394</b>	<b>1335</b>	<b>1276</b>	<b>1219</b>				

### Accessories- Set metal

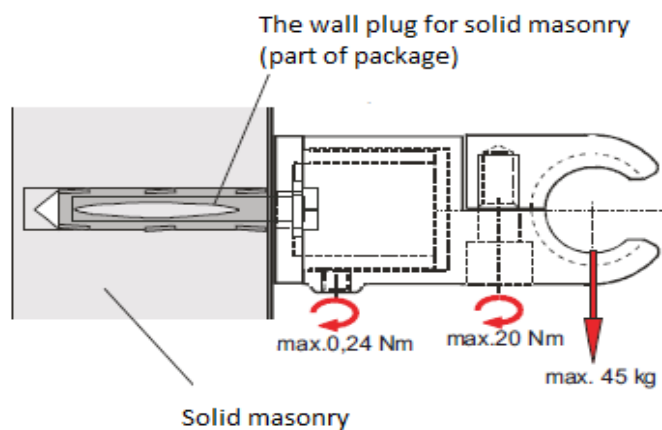

The plug and bleed screw G 1/2"



The material: German silver

Tightening torque max. 25 Nm  $\pm$  3 Nm

