


Bathroom radiators "NEPTUN-N"

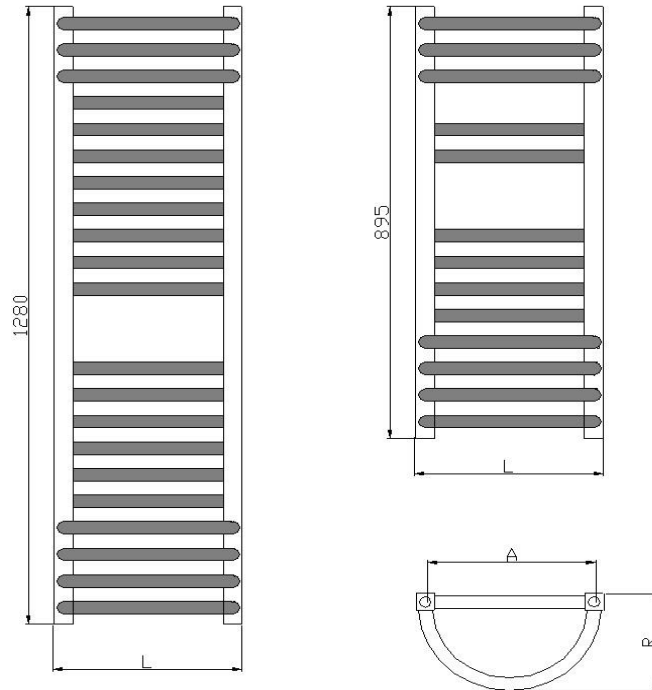

Characteristic details:

Width	L	(mm)	350	
High	H	(mm)	895	1280
Spacing	A	(mm)		
Test overpressure	p	(MPa)	1,3	
The overpressure	p	(MPa)	1,0	
Depth	R	(mm)		
Conection: lower DN			G 1/2" intern	

Material:

The steel profile	35 x 35 x 1,5 mm
Steel tube	∅ 26 x 1,2 mm
Including accessories	
Waranty	5 years on the radiator


Surface design:

standard RAL 9016
RAL

NEPTUN-N
The heat output Q (W) and engineering characteristic
RAL

The type designation	Width L (mm)	High H (mm)	Depth R (mm)	Spacing A (mm)	tw1/tw2 = 90/70 (°C) near t1 (°C)					The water content (l)	Weight (kg)	The total area SL (m ²)	Recommended output of heating element (W)
					tw1/tw2 = 75/65 (°C) near t1 (°C)								
					tw1/tw2 = 55/45 (°C) near t1 (°C)								
					15	18	20	22	24				
NN-01-350.0895-55-01	350	850	200	315	533	502	480	459	439	4,5	7,4	0,800	300
					429	404	387	370	353				
NN-01-350.1280-55-01	350	1280	200	315	727	683	655	626	598	5,5	10,1	1,090	400
					585	550	527	504	481				
					291	273	262	250	239				

Accessories- Set metal

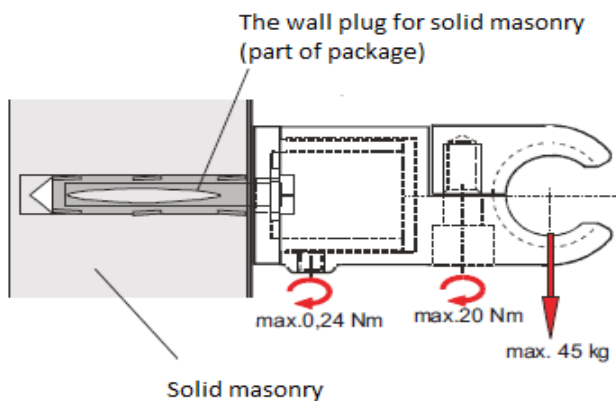

The plug and bleed screw G 1/2"



The material: German silver

Tightening torque max. 25 Nm \pm 3 Nm