

Characteristic details:

Width	L	(mm)	500
High	H	(mm)	1000 1220 1440 1660 1880
Spacing	A	(mm)	
Test overpressure	p	(Mpa)	1,3
The overpressure	p	(Mpa)	1,0
Depth	R	(mm)	
Connection DN			4x G 1/2" internal

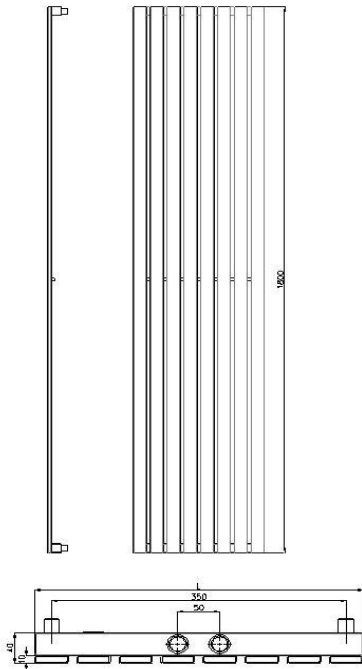
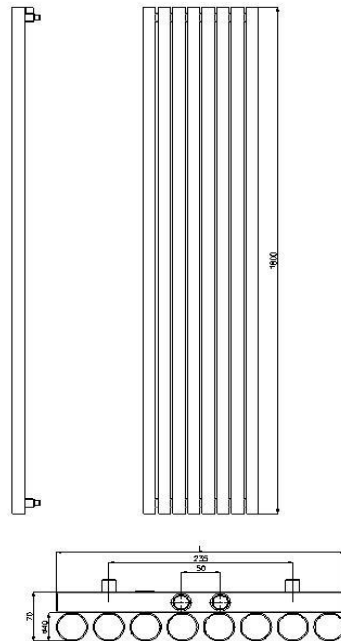
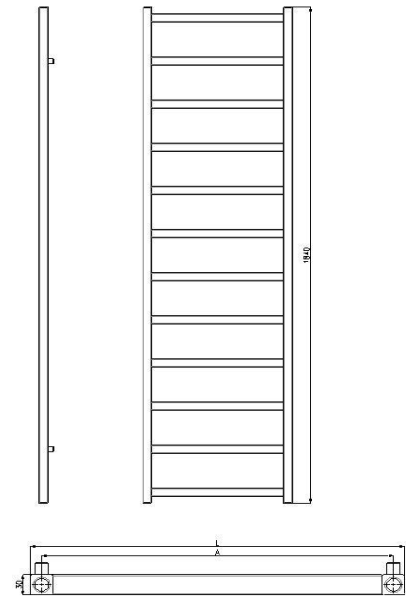
Material:

The steel profile	30 x 30 mm
The steel profile	30 x 20 mm
Including accessories	
Waranty	5 years on the radiator
color	brushed stainless steel



PHOENIX**The heat output Q (W) and engineering characteristic**

The type designation	Width L (mm)	High H (mm)	Depth R (mm)	Spacing A (mm)	heat output W 75/65/20°C	The water content (l)	Weight (kg)
PH-89-0500.1000	500	1000	60	50	464	4,9	12,7
PH-89-0500.1220	500	1220	60	50	558	5,9	15,2
PH-89-0500.1440	500	1440	60	50	668	7	17,7
PH-89-0500.1660	500	1660	60	50	770	7,8	20,2
PH-89-0500.1880	500	1880	60	50	872	8,9	22,7

Pegas

Lupus

Centaur

Characteristic details:

Width	L	(mm)	Pegas/Lupus/Centaur	390/370/500
High	H	(mm)	Pegas/Lupus/Centaur	1800/1800/1840
Spacing	A	(mm)		
Test overpressure	p	(Mpa)		
The overpressure	p	(Mpa)	1,0	
Depth	R	(mm)		
Connection DN			4x G 1/2" internal	

Material:

	Pegas	Lupus	Centaur
The steel profile	40 x 30 mm	∅ 40 mm	30 x 30 mm
The steel profile	40 x 10 mm	D40 x 30 mm	
Including accessories			
Waranty	5 years on the radiator		
color	brushed stainless steel		

The heat output Q (W) and engineering characteristic

The type designation	Name	Width L (mm)	High H (mm)	Depth R (mm)	Spacing A (mm)	heat output W 75/65/20°C	The water content (l)	Weight (kg)
PE-89-0390.1800	Pegas	390	1800	52	390	683	4,9	18,0
LU-89-0370.1800	Lupus	370	1800	80	370	861	16,2	22,4
CT-89-0500.1840	Centaur	500	1840	50	470	429	5,6	11,2