


Bathroom radiators "CAPRI"

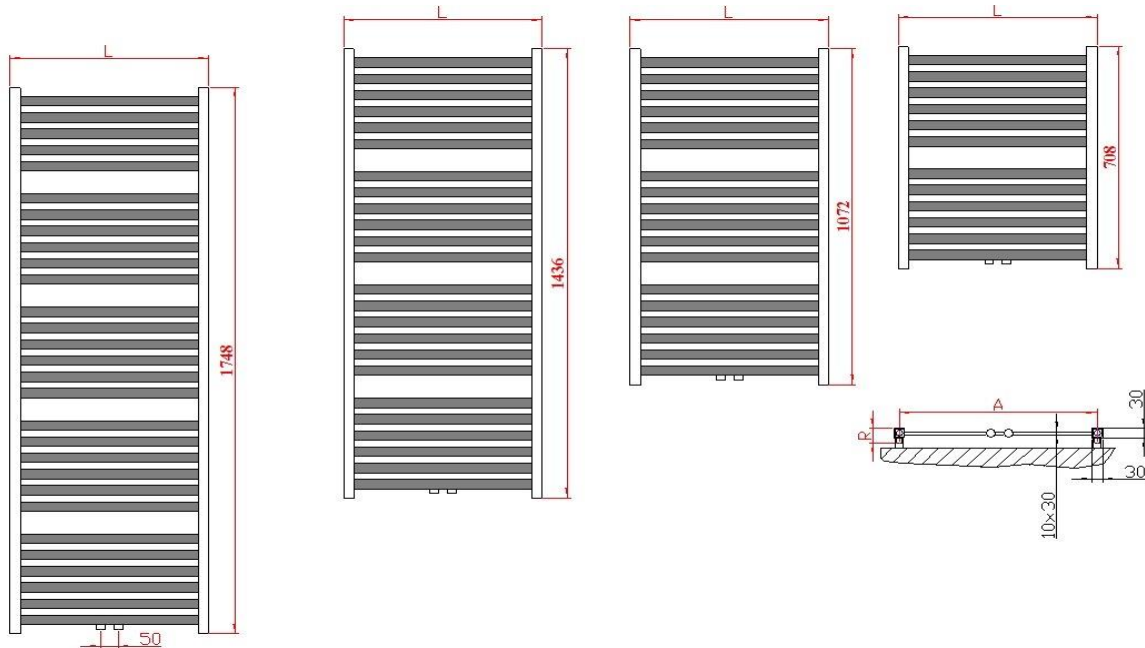

Characteristic details:

Width	L	(mm)	500	600		
High	H	(mm)	708	1072	1436	1748
Spacing	A	(mm)	470	570		
Test overpressure	p	(Mpa)	1,3			
The overpressure	p	(Mpa)	1,0			
Depth	R	(mm)	45			
Conection: center DN			G 1/2" innen			

Material:

- Square profile 30 x 30 x 1,5 mm
- Square tubes 30 x 10 mm
- Including accessories
- Waranty 5 years on the radiator

Surface design:

standard RAL 9016
RAL



CAPRI

The heat output Q (W) and engineering characteristic

RAL

The type designation	Width L (mm)	High H (mm)	Depth R (mm)	Spacing A (mm)	tw1/tw2 = 75/65 (°C) při T 20 ° C	The water content (l)	Weight (kg)	The total area SL (m ²)	Recommended output of heating element (W)
NC-08-500.0708-52	500	708	45	470	302	2,03	6,9	0,596	200
NC-08-600.0708-52	600	708	45	570	350	2,25	7,9	0,692	300
NC-08-500.1072-52	500	1072	45	470	453	3,89	10,3	0,894	400
NC-08-600.1072-52	600	1072	45	570	527	4,15	11,9	1,038	400
NC-08-500.1436-52	500	1436	45	470	605	5,31	13,7	1,193	500
NC-08-600.1436-52	600	1436	45	570	704	5,57	15,8	1,385	600
NC-08-500.1748-52	500	1748	45	470	733	5,83	16,5	1,444	600
NC-08-600.1748-52	600	1748	45	570	852	6,09	19,1	1,676	800